

R.W. ATLAS

RWXS61

R.W. Atlas Exposed Thermostatic System with Handshower, Diverter and Wheel Handle



SHOWN IN R.W. ATLAS EXPOSED THERMOSTATIC SYSTEM WITH HANDSHOWER, DIVERTER AND WHEEL HANDLE | RWXS61

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray
 Depth/Width: 29 5/16"
 Diameter Of Head: 8 9/16"
 Escutcheon Primary Material: Brass
 Fittings Hole Diameter: 1"
 Flow Restriction Options: 2.5, 2.0, 1.75, 1.5, 0.92
 Inlet Connection Size: 3/4"
 Inlet Connection Type: Copper Compression
 Inlet Supply Spread Maximum: 11 3/4"
 Inlet Supply Spread Minimum: 11 1/2"
 Installation Type: Wall Mounted
 Integrated Diverter: Y
 Integrated Spray: N
 Number Of Handles: Two
 Primary Material: Brass
 Suggested Application: Bath
 Valve Material: Bi-metal Strip
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Powerful shapes, exquisite materials, and unique aesthetic details define R.W. Atlas. This groundbreaking collection pairs American ingenuity with European craftsmanship, delivering refined industrial-inspired character that fits seamlessly into any space.

CODES & STANDARDS

CEC, State of MA

PRODUCT FEATURES

Features a flat round 8" shower head

Exposed slotted screws around shower head offer added design detail.

Built in Anti-scald protection.

Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.


CERTIFICATIONS

PRODUCT (NOTES)

R.W. ATLAS


RWXS61

R.W. Atlas Exposed Thermostatic System with Handshower, Diverter and Wheel Handle

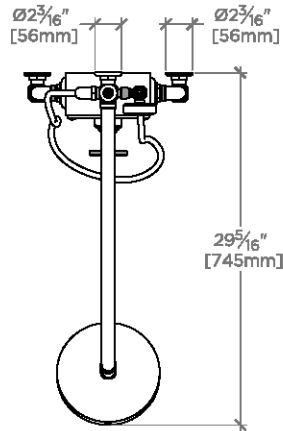


TOP VIEW

SCALE: 3/4"=1'-0"

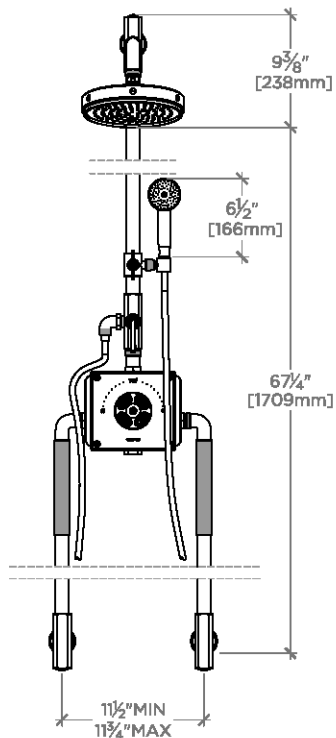

FRONT VIEW

SCALE: 3/4"=1'-0"

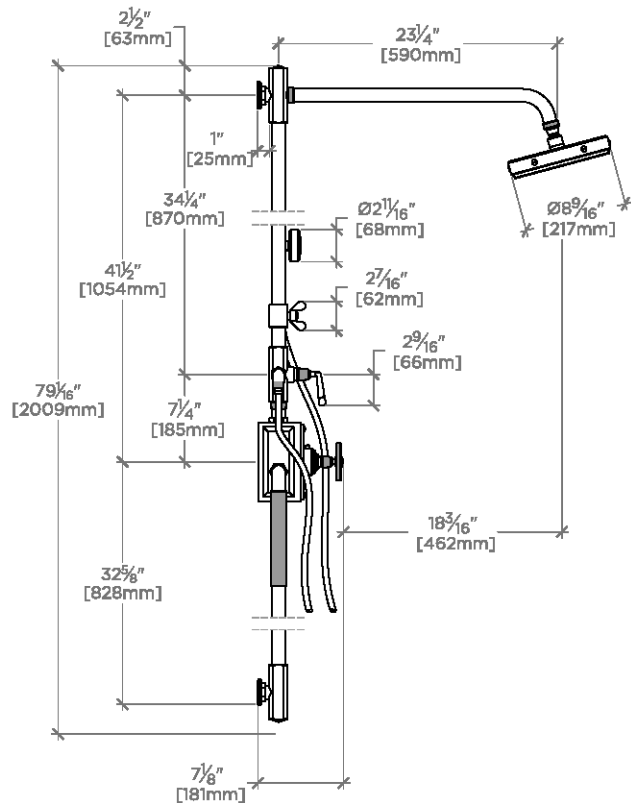

SIDE VIEW

SCALE: 3/4"=1'-0"