

UNIVERSAL

USH108

Universal Classic 8" Rain Showerhead



SHOWN IN UNIVERSAL CLASSIC 8" RAIN SHOWERHEAD | USH108

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray
 Flow Restriction Options: 1.5, 1.75, 2.0
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Female NPT
 Pivot: Y
 Primary Material: Brass
 Restricted Maximum Flow Rate: 1.75 gpm
 Water Pressure Maximum: 85.0 psi
 Water Pressure Minimum: 20.0 psi
 Water Pressure Recommended: 45.0 psi

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

USH108X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Compatible with an assortment of Waterworks arms and flanges, sold separately

Swiveling 8" rain showerhead

91 easy clean rubber nozzles prevent calcium buildup


Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS




PRODUCT (NOTES)

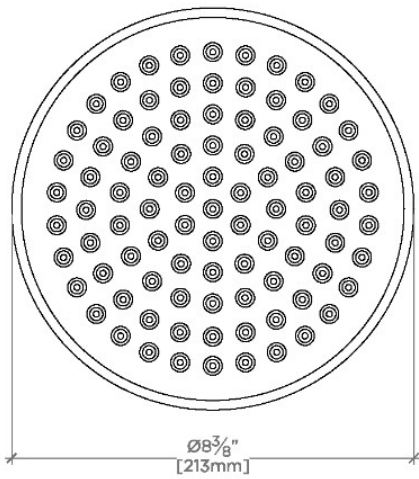

CEILING VIEW SCALE: 3"=1'-0"

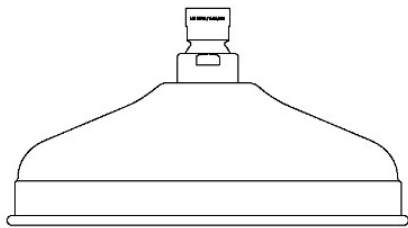

FRONT VIEW SCALE: 3"=1'-0"

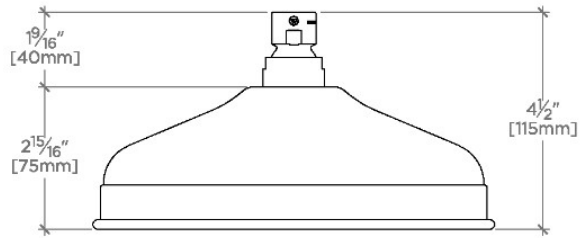

SIDE VIEW SCALE: 3"=1'-0"