



PORTLANDIA features a harmonious blend of terrazzo and solid cement tiles. Handcrafted by Italian artisans in a range of sizes and finishes, they give walls and floors a cool, urbane look.



SOLID FIELD TILE



4" X 4" * POFO44



8" X 8" * POFO88





Portlandia

SOLID PALETTE



















^{**} Available in Honed Finish Only



TERRAZZO PICCOLO FIELD TILE



8" X 8" * POF88P






16" X 16" ** POF16P



TERRAZZO PICCOLO FIELD TILE

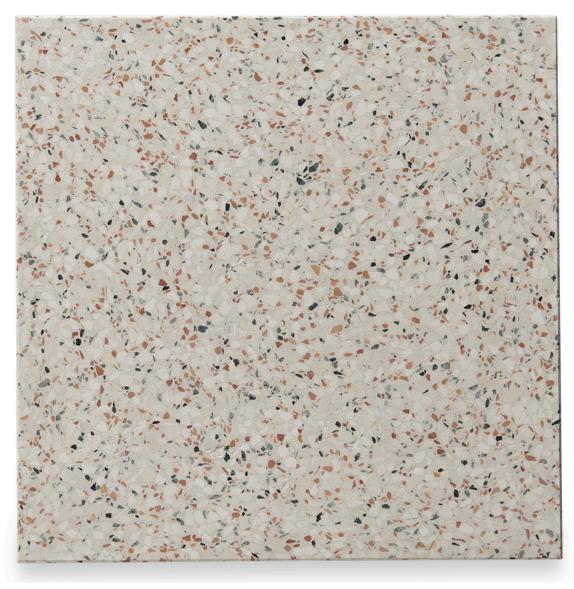

24" X 24" ** POF24P

**3/4" thick



Portlandia

TERRAZZO PICCOLO PALETTE





TERRAZZO MEZZO FIELD TILE



16" X 16" ** POF16M



TERRAZZO MEZZO FIELD TILE



24" X 24" ** POF24M

** 3/4" thick




Portlandia

TERRAZZO MEZZO PALETTE















TERRAZZO ARMONIA FIELD TILE



16" X 16" ** POF16A



TERRAZZO ARMONIA FIELD TILE




24" X 24" ** POF24A

**3/4" thick



TERRAZZO ARMONIA PALETTE




Ellsworth**










* See variation chart on page 16 ** Available in Antiqued, Honed and Polished Finishes



Portlandia

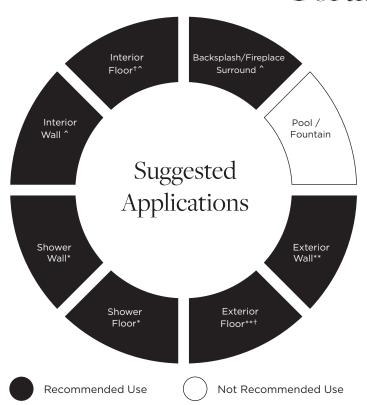


Application Notes

- * Suitable for use in wet environments, including steam showers, if properly installed, sealed, and maintained
- ** All styles suitable for exterior use in tropical/subtropical climate. Piccolo, Armonia, Liscia and Mezzo are suitable for use in feeze/thaw climates.
- [†] For commercial applications, please inquire
- ^ Suitable applications for Portlandia Instock

Installation / Maintenance

- \bullet WATERWORKS ASSUMES NO RESPONSIBILITY FOR INSTALLATION
- Installation constitutes acceptance.
- Tile should be installed by a licensed and experienced tile setter.
- Refer to TCNA (Tile Council of North America) or ANSI standards for installation guidelines.
- All tile must be inspected PRIOR to installation.
- Dry lay tile prior to installation to allow for blending of color variation.
- Tile should be sealed PRIOR to grouting. Dark grout can stain crackle tile.
- Waterworks recommends a grouted test panel prior to installation to understand final appearance of grouted materials
- Re-seal tile and grout after installation and maintain regularly.

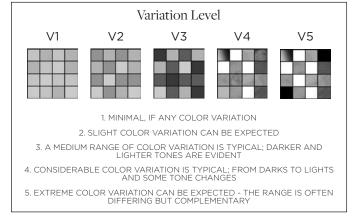

PLEASE REFER TO COLLECTION TEARSHEET FOR VARIATION LEVEL BY COLOR.

SAMPLING IS RECOMMENDED TO UNDERSTAND VARIATION OF MATERIAL


Product Variation


Color, size and surface variation is an inherent characteristic of our cement tile and should be expected. Refer to our color variation ranking for further details. Please inquire for additional information.

Custom Opportunities Available

Minimums and extended lead-times may apply.

Please contact your local Waterworks showroom or our direct sales team at 800.899.6757.







INSTOCK TERRAZZO PALETTE



16" x 16" **