

Universal

UTCL24

Universal Transitional 24" Ceiling Mounted Shower Arm with Flange



SHOWN IN UNIVERSAL TRANSITIONAL 24" CEILING MOUNTED SHOWER ARM WITH FLANGE | UTCL24

TECHNICAL DETAILS

Fittings Hole Diameter: 32 mm
 Inlet Connection Size: 1/2"
 Inlet Connection Type: Male NPT
 Outlet Connection Size: 1/2"
 Outlet Connection Type: Male NPT
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Featuring enduring designs that complement any Waterworks element, this collection spans fittings to accessories, bringing exquisite proportion and balance to any environment.

CODES & STANDARDS

PRODUCT FEATURES

Compatible with an assortment of Waterworks showerheads, sold separately

Brass Construction

Includes 24" ceiling mounted shower arm

Stocked in Chrome, Nickel and Brass


CERTIFICATIONS

PRODUCT (NOTES)

Universal


UTCL24

Universal Transitional 24" Ceiling Mounted Shower Arm with Flange




CEILING VIEW SCALE: 3"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
UTCL06	7 ⁷ / ₈ " [181mm]	6 ⁹ / ₁₆ " [167mm]
UTCL12	13 ¹ / ₈ " [334mm]	12 ⁹ / ₁₆ " [319mm]
UTCL18	19 ¹ / ₈ " [486mm]	18 ⁹ / ₁₆ " [471mm]
UTCL24	25 ¹ / ₈ " [639mm]	24 ⁹ / ₁₆ " [624mm]

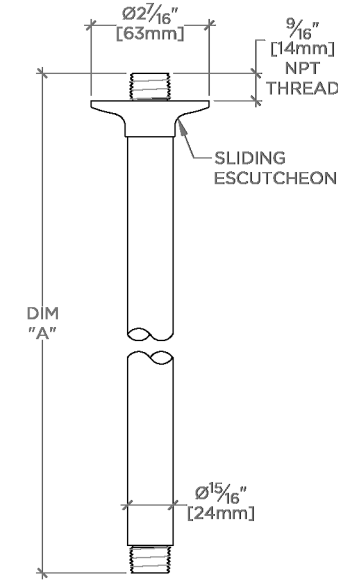

FRONT VIEW SCALE: 3"=1'-0"

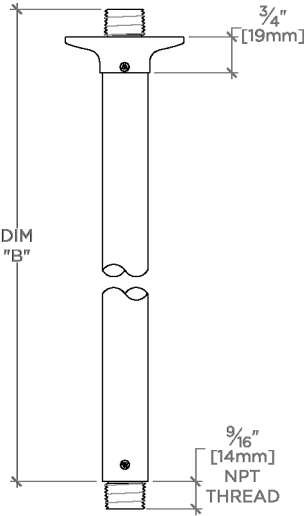

SIDE VIEW SCALE: 3"=1'-0"