

UNIVERSAL

UNTS34

Universal Wall Mounted Tub Spout



SHOWN IN UNIVERSAL WALL MOUNTED TUB SPOUT | UNTS34

TECHNICAL DETAILS

ADA Compliance: Yes
 Adjustable Versus Fixed Spray: Fixed Spray
 Depth/Width: 195 mm
 Escutcheon Primary Material: Brass
 Fittings Hole Diameter: 32 mm
 Inlet Connection Size: 3/4"
 Inlet Connection Type: Female NPT
 Installation Type: Wall Mounted
 Length: 64 mm
 Primary Material: Brass
 Spout Swivel: N
 Suggested Application: Bath
 Water Pressure Maximum: 6.0 bar
 Water Pressure Minimum: 1.5 bar
 Water Pressure Recommended: 3.0 bar

INSPIRATION

Featuring enduring designs that complement any Waterworks element, this collection spans fittings to accessories, bringing exquisite proportion and balance to any environment.

CODES & STANDARDS

ASME A112.18.1/CSA B125.1, CEC, State of MA, WRAS

PRODUCT FEATURES

Create a refined environment for your daily ritual by installing an exquisitely proportioned Universal tub spout

A clean, universal aesthetic is applicable to all bath environments (traditional to modern)

A wall mounted tub spout works seamlessly with Waterworks' thermostatic or diverter shower systems

CERTIFICATIONS




PRODUCT (NOTES)


UNIVERSAL

UNTS34


Universal Wall Mounted Tub Spout

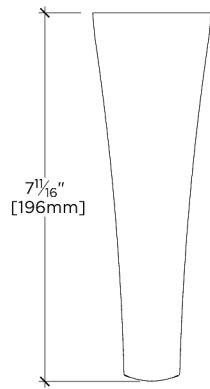

TOP VIEW SCALE: 3"=1'-0"



FRONT VIEW SCALE: 3"=1'-0"

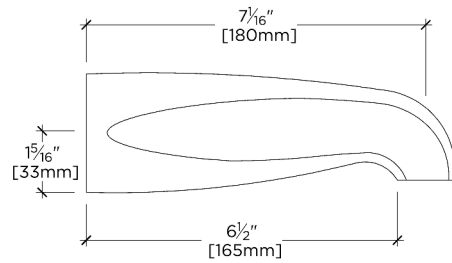

SIDE VIEW SCALE: 3"=1'-0"