

UNIVERSAL

USH112

Universal Classic 12" Rain Showerhead



SHOWN IN UNIVERSAL CLASSIC 12" RAIN SHOWERHEAD | USH112

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray
Flow Restriction Options: 1.5, 1.75, 2.0
Inlet Connection Size: 1/2"
Inlet Connection Type: Female NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

USH112X, ASME A112.18.1/CSA B125.1, CEC(1.5GPM & 1.75GPM Only), WaterSense(1.5GPM, 1.75GPM & 2.0GPM Only), DOE, State of MA

PRODUCT FEATURES

Compatible with an assortment of Waterworks arms and flanges, sold separately

Swiveling 12" rain showerhead

157 easy clean rubber nozzles prevent calcium buildup

Stocked in Brass, Chrome and Nickel


Rain showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS




PRODUCT (NOTES)


Universal Classic 12" Rain Showerhead

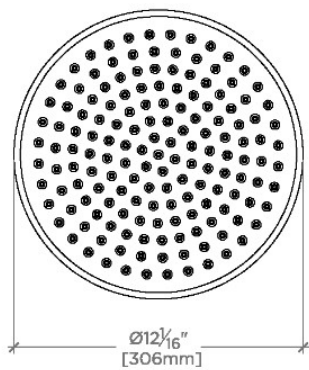

CEILING VIEW SCALE: $1\frac{1}{2}"=1'-0"$



FRONT VIEW SCALE: $1\frac{1}{2}"=1'-0"$

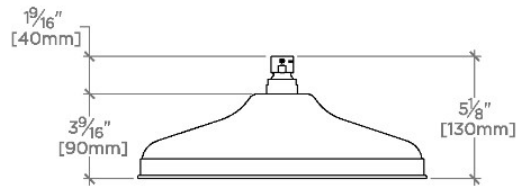

SIDE VIEW SCALE: $1\frac{1}{2}"=1'-0"$