



Style No. AALTO2 [AA02LT]
Wall Mounted Single Arm Sconce with Glass Shade

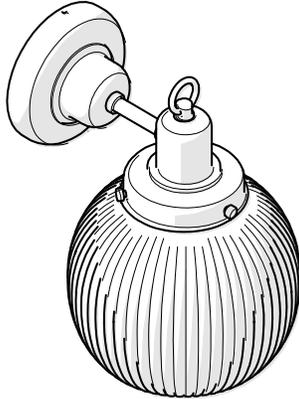

Style No. AALTO1 [AA01LT]
Ceiling Mounted Large Pendant with Glass Shade

Style No. AALTO3 [AA03LT]
Ceiling Mounted Small Pendant with Glass Shade

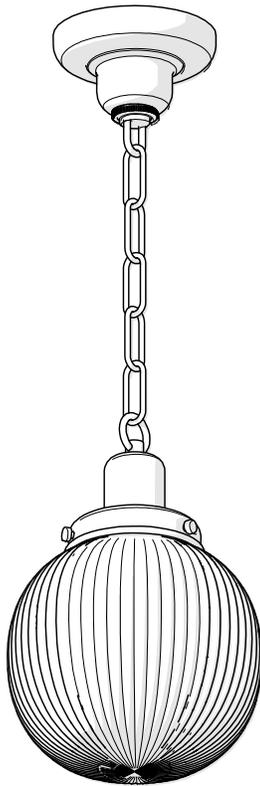

* All items in [BRACKETS] refer to UK styles

SPECIFICATIONS:

Bulb Base Size: E26 [E27]

Bulb Type for AALTO1 [AA01LT]: A21

Bulb Type for AALTO2 [AA02LT] and AALTO3 [AA03LT]: A19

Junction Box Orientation: Any

Junction Box Size: Standard 3-1/2"

Max Wattage for AALTO1 [AA01LT]: 150 Watt

Max Wattage for AALTO2 [AA02LT] and AALTO3 [AA03LT]: 75 Watt

Orientation for AALTO2 [AA02LT]: Wall Up or Down

Orientation for AALTO1 [AA01LT] / AALTO3 [AA03LT]:
Ceiling Only

Shade Material: Glass

Voltage: 120 [240]

Required Electrical Feeds:

US: Black "Hot" wire; White "Neutral" wire; Green or Bare "Ground" wire

UK: [Brown "Line" wire; Blue "Neutral" wire; Green/Yellow Striped or Bare "Earth" wire]

IMPORTANT:

- **WARNING:** The power supply must be turned off prior to installation. Turn off the main electrical supply to the junction box from the fuse box/circuit breaker. Turning power off at the switch is not sufficient.
- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this product must keep this information for future reference.
- AALTO1, AALTO2, and AALTO3 are U.L. certified and are suitable for damp or dry locations. The U.L. listing mark can be found on the inside of the cover plate.
- AA01LT, AA02LT, and AA03LT are CE rated. Proof of CE compliance will be provided upon request.
- Be sure your installation conforms to all federal, state, and local codes.
- This product must be installed by a professional licensed electrical contractor.
- Refer to the specification and assembly drawings attached. Product is sold partially assembled but shown fully disassembled for illustrative and service purpose only.
- Max wattage for AALTO1 [AA01LT] is 150 watts for incandescent A21 base light bulbs. Max wattage for AALTO2 [AA02LT] and AALTO3 [AA03LT] is 75 watts for incandescent A19 base light bulbs.

These guidelines have been prepared for the professional contractor to aid in the installation of:
AURORA CEILING MOUNTED LARGE PENDANT / SMALL PENDANT WITH GLASS SHADE (STYLE# AALTO1 / AALTO3 [AA01LT / AA03LT]) & AURORA WALL MOUNTED SINGLE ARM SCONCE WITH GLASS SHADE (STYLE# AALTO2 [AA02LT])

All dimensions are based on original specification and are subject to change and variation.
Please consult your Design Associate for current specifications.

WATERWORKS

SCONCE INSTALLATION:

- **REQUIRED:** Install a 3-1/2" octagonal electrical junction box at the desired height.
- See Figure - 01 for Steps 1 - 2.

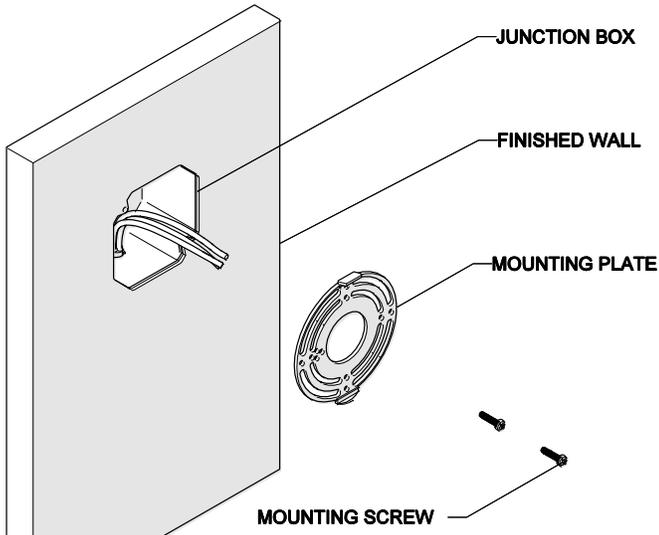


FIGURE - 01

1. Remove the MOUNTING PLATE by unthreading the SET SCREW from the back plate.
 2. Pull the wires in the JUNCTION BOX through the center hole of the MOUNTING PLATE. Attach the MOUNTING PLATE to the JUNCTION BOX using the MOUNTING SCREWS making sure to keep the proper alignment of the plate.
- See Figure - 02 for Steps 3 - 6.

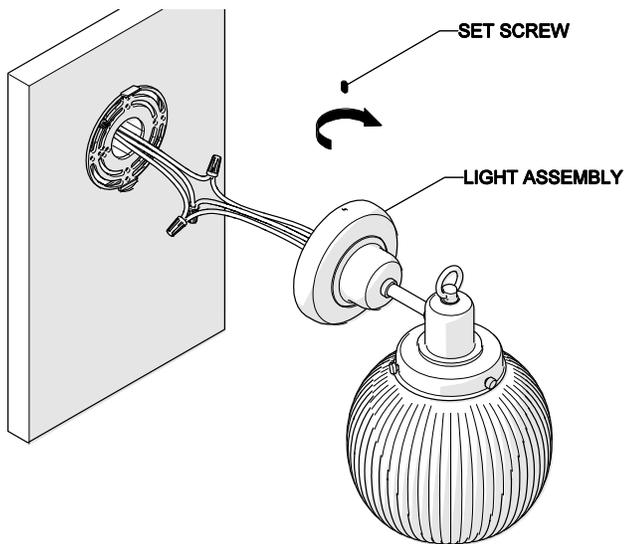


FIGURE - 02

3. Fasten the bare copper fixture wire to the green or bare copper wire in the box with a wire nut or fasten it to the MOUNTING PLATE with the ground screw provided.
4. Fasten the white fixture wire to the white wire in the box with a wire nut. Tightly wrap the connection with electrical tape beginning 1" [25mm] below the wire nut to ensure the tape seals the end of the nut. Make sure that there are no exposed wires that could cause a short circuit.
5. Repeat previous step with the black fixture wire and the black wire from the junction box. Make sure the wires are pushed into the junction box.
6. Attach the LIGHT ASSEMBLY to the MOUNTING PLATE on the wall by reinserting the SET SCREW.

PENDANT INSTALLATION:

- **REQUIRED:** Install a 3-1/2" octagonal electrical junction box at the desired location.
- See Figure - 03 for Steps 7 - 8.

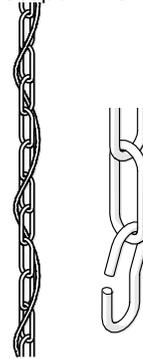


FIGURE - 03

7. To adjust the CHAIN to the desired height, spread open a link and remove excess links until the desired height is achieved.
 8. Reinstall links at desired height and cut any excess wire.
- See Figure - 04 for Steps 9 - 13.

These guidelines have been prepared for the professional contractor to aid in the installation of:
 AURORA CEILING MOUNTED LARGE PENDANT / SMALL PENDANT WITH GLASS SHADE (STYLE# AALT01 / AALT03
 (AA01LT / AA03LT)) & AURORA WALL MOUNTED SINGLE ARM SCONCE WITH GLASS SHADE (STYLE# AALT02
 (AA02LT))
 All dimensions are based on original specification and are subject to change and variation.
 Please consult your Design Associate for current specifications.

WATERWORKS

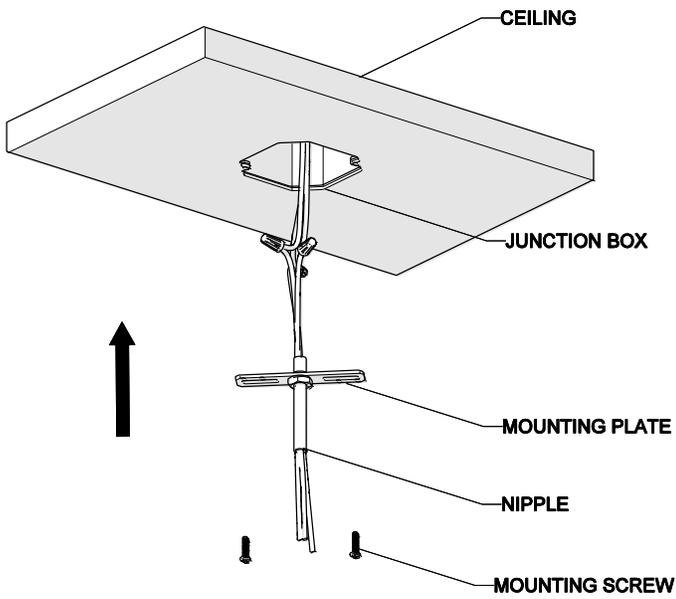


FIGURE - 04

9. Pull the wires from the light through the center of the MOUNTING PLATE.
 10. Fasten the bare copper fixture wire to the green or bare copper wire in the box with a wire nut or fasten it to the MOUNTING PLATE with the ground screw provided.
 11. Fasten the white fixture wire to the white wire in the box with a wire nut. Tightly wrap the connection with electrical tape beginning 1" [25mm] below the wire nut to ensure the tape seals the end of the nut. Make sure that there are no exposed wires that could cause a short circuit.
 12. Repeat previous step with the black fixture wire and the black wire from the junction box. Make sure the wires are pushed into the junction box.
 13. Attach the MOUNTING PLATE to the JUNCTION BOX using the MOUNTING SCREWS making sure to keep the proper alignment of the plate.
- See Figure - 05 for Step 14.

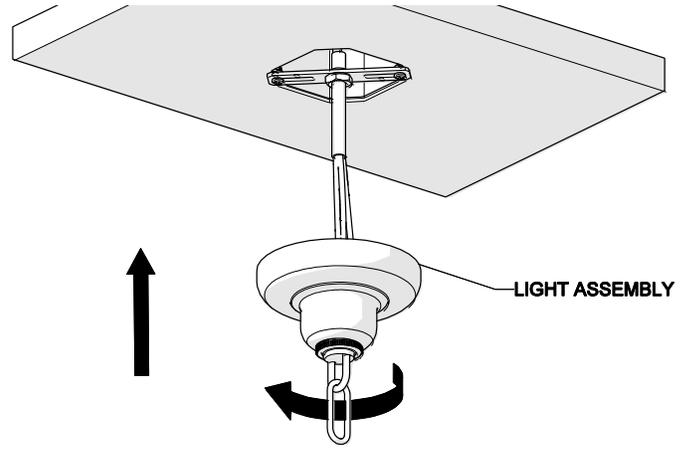


FIGURE - 05

14. Thread the LIGHT ASSEMBLY to the NIPPLE on the MOUNTING PLATE making sure it's secure.

SERVICING THE LIGHT:

- See Figure - 06 for Step 15.
15. Unscrew the RETAINING SCREWS and remove the SHADE to gain access to the BULB for cleaning and servicing.
- If further assistance is required, please contact Product Support at 1-800-927-2120 (8am-6pm EST).

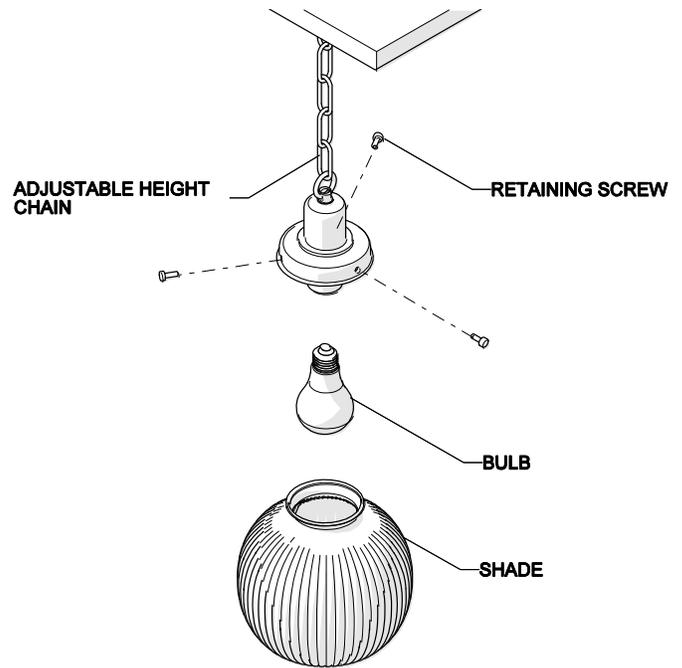


FIGURE - 06

These guidelines have been prepared for the professional contractor to aid in the installation of:
 AURORA CEILING MOUNTED LARGE PENDANT / SMALL PENDANT WITH GLASS SHADE (STYLE# AALT01 / AALT03
 (AA01LT / AA03LT)) & AURORA WALL MOUNTED SINGLE ARM SCONCE WITH GLASS SHADE (STYLE# AALT02
 (AA02LT))
 All dimensions are based on original specification and are subject to change and variation.
 Please consult your Design Associate for current specifications.