

## R.W. ATLAS

R.W. Atlas Ceiling Mounted Shower Head, Arm and Flange

## RW10SH



SHOWN IN R.W. ATLAS CEILING MOUNTED 8 1/2" SHOWER HEAD, ARM AND FLANGE| RWSH10

### TECHNICAL DETAILS

ADA Compliance: When installed per ADA guidelines  
Adjustable versus Fixed Spray: Fixed Spray  
Diameter of Head: 216 mm  
Escutcheon Primary Material: Brass  
Fittings Hole Diameter: 32 mm  
Flow Restriction Options: 2.0  
Depth / Width: 460 mm  
Height: 197 mm  
Inlet Connection Size: 1/2"  
Inlet Connection Type: Female NPT  
Installation Type: Wall Mounted  
Integrated Diverter: N  
Integrated Spray: N  
Length: 217 mm  
Pivot: N  
Primary Material: Brass  
Restricted Maximum Flow Rate: 9.5 liters/min  
Spout Swivel: N  
Spray Included in Unit: N  
Suggested Application: Bath  
Water Pressure Maximum: 6.0 bar  
Water Pressure Minimum: 1.5 bar  
Water Pressure Recommended: 3.0 bar

### INSPIRATION

Powerful shapes, genuine materials and unique aesthetic details. The original, impeccable vision of R.W. Atlas pairs American ingenuity with European craftsmanship.

### CODES & STANDARDS

Code # RWSH01: Certified with CEC

### PRODUCT FEATURES

Features flat round 8" shower head.  
Exposed slotted screws around shower head offer added design detail.  
Brass face plate with rubber nozzles .  
Standard flow rate is 2.5gpm (9.5 L/min). Also available in high efficient flow options. Contact your sales associate or call 1 (800) 899-6757 for details.

### CERTIFICATIONS




# WATERWORKS

## R.W. ATLAS

## RW10SH

R.W. Atlas Ceiling Mounted Shower Head, Arm and Flange

ADAPTER(S) PACKAGED SEPARATELY		
ADAPTER	DESCRIPTION	QTY
UNUK04	Universal 1/2" NPT Male x 1/2" Male Nipple 50mm Long BSP	1

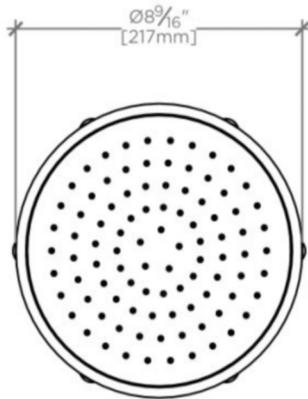


CEILING VIEW

SCALE: 2"=1'-0"




ISO VIEW

SCALE: 2"=1'-0"

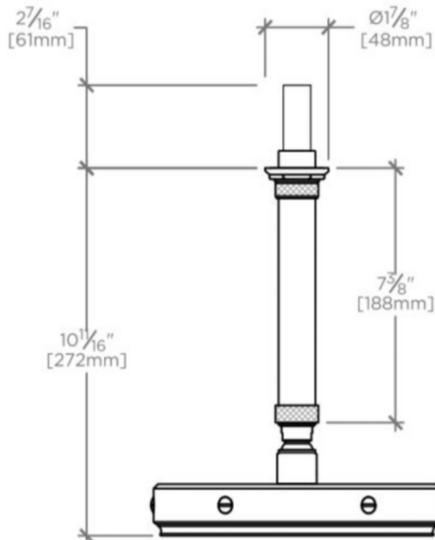

FRONT VIEW

SCALE: 2"=1'-0"

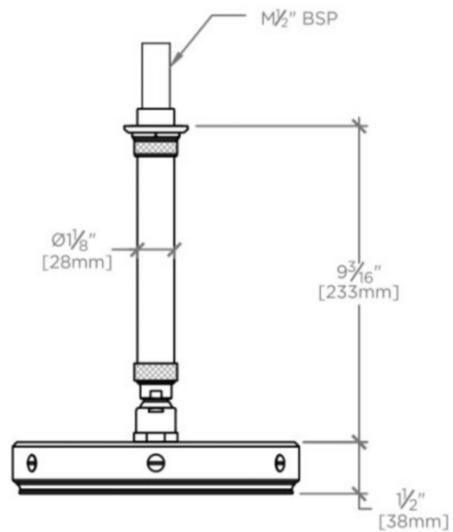

SIDE VIEW

SCALE: 2"=1'-0"